

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				

APPLICABLE STANDARD									
RATING	OPERATING TEMPERATURE RANGE	-55 °C TO 85 °C		STORAGE TEMPERATURE RANGE		-10 °C TO 50 °C (PACKED CONDITION)			
	VOLTAGE	30 V AC/DC		OPERATING OR STORAGE HUMIDITY RANGE		RELATIVE HUMIDITY 90 % MAX (NOT DEWED)			
	CURRENT	0.2 A		APPLICABLE CABLE		t=0.2±0.03mm, GOLD PLATING			

SPECIFICATIONS							
ITEM	TEST METHOD		REQUIREMENTS	QT	AT		
CONSTRUCTION							
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.		ACCORDING TO DRAWING.	×	×		
MARKING	CONFIRMED VISUALLY.			×	×		
ELECTRIC CHARACTERISTICS							
VOLTAGE PROOF	90 V AC FOR 1 min.		NO FLASHOVER OR BREAKDOWN.	×	×		
INSULATION RESISTANCE	100 V DC.		50 MΩ MIN.	×	×		
CONTACT RESISTANCE	AC 20 mV MAX (1 KHz) , 1 mA .		100 mΩ MAX. INCLUDING FPC BULK RESISTANCE (L=12mm)	×	×		
MECHANICAL CHARACTERISTICS							
VIBRATION	FREQUENCY 10 TO 55 Hz, HALF AMPLITUDE 0.75 mm FOR 10 CYCLES IN 3 DIRECTIONS.		① NO ELECTRICAL DISCONTINUITY OF 1 μs. ② CONTACT RESISTANCE: 100 mΩ MAX.	×	—		
SHOCK	981 m/s ² , DURATION OF PULSE 6 ms AT 3 TIMES IN 3 DIRECTIONS.		③ NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	×	—		
MECHANICAL OPERATION	10 TIMES INSERTIONS AND EXTRACTIONS.		① CONTACT RESISTANCE: 100 mΩ MAX. ② NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	×	—		
FPC RETENSION FORCE	MEASURED BY APPLICABLE FPC. (THICKNESS OF FPC SHALL BE t=0.20mm AT INITIAL CONDITION.)		① DIRECTION OF INSERTION : 0.15N × nMIN. (note 1)	×	—		
ENVIRONMENTAL CHARACTERISTICS							
CORROSION SALT MIST	EXPOSED AT 35±2°C , 5 % SALT WATER SPRAY FOR 96 h.		① CONTACT RESISTANCE: 100 mΩ MAX. ② NO DAMAGE, CRACK AND LOOSENESS OF PARTS. ③ NO EVIDENCE OF CORROSION WHICH AFFECTS TO OPERATION OF CONNECTOR.	×	—		
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55→+15 TO +35→+85→+15 TO +35°C TIME 30→ 2~3 → 30→ 2~3 min UNDER 5 CYCLES.		① CONTACT RESISTANCE: 100 mΩ MAX. ② INSULATION RESISTANCE: 50 MΩ MIN. ③ NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	×	—		
DAMP HEAT (STEADY STATE)	EXPOSED AT 40±2 °C, RELATIVE HUMIDITY 90 TO 95 %, 96 h.			×	—		
EMARKS			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			S.SUNAGA 04.03.18	S.SUNAGA 04.03.18	<i>M. Ishida</i> 04.03.18	<i>M. Ishida</i> 04.03.18	
Unless otherwise specified, refer to JIS C 5402.							
Note QT:Qualification Test AT:Assurance Test X:Applicable Test							
HRS HIROSE ELECTRIC CO., LTD.			SPECIFICATION SHEET		PART NO. FH26-**-0.3SHW (05)		
CODE NO.(OLD) CL		DRAWING NO. ELC4-154381-01		CODE NO. CL580		1/2	

SPECIFICATIONS				
ITEM	TEST METHOD	REQUIREMENTS	QT	AT
DAMP HEAT, CYCLIC	EXPOSED AT -10 TO +65 °C, RELATIVE HUMIDITY 90 TO 96 %, 10 CYCLES, TOTAL 240 h.	① CONTACT RESISTANCE: 100 mΩ MAX. ② INSULATION RESISTANCE: 1 MΩ MIN. (AT HIGH HUMIDITY) ③ INSULATION RESISTANCE: 50 MΩ MIN. (AT DRY) ④ NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	×	—
DRY HEAT	EXPOSED AT 85±2 °C, 96 h.	① CONTACT RESISTANCE: 100 mΩ MAX.	×	—
COLD	EXPOSED AT -55±2 °C, 96 h.	② NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	×	—
SULPHUR DIOXIDE [JIS C 0090]	EXPOSED AT 40±2 °C RELATIVE HUMIDITY 80±5%, 25±5 PPM FOR 96 h.	① CONTACT RESISTANCE: 100 mΩ MAX. ② NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	×	—
HYDROGEN SULPHIDE [JIS C 0092]	EXPOSED AT 40±2 °C RELATIVE HUMIDITY 80±5%, 10 ~ 15 PPM FOR 96 h.	③ NO EVIDENCE OF CORROSION WHICH AFFECTS TO OPERATION OF CONNECTOR.	×	—
SOLDERABILITY	SOLDERED AT SOLDER TEMPERATURE, 235±5 °C FOR IMMERSION DURATION, 2±0.5 sec.	A NEW UNIFORM COATING OF SOLDER SHALL COVER A MINIMUM OF 95 % OF THE SURFACE BEING IMMersed.	×	—
RESISTANCE TO SOLDERING HEAT	1) REFLOW SOLDERING : PEAK TMP. 250 °C MAX. REFLOW TMP. 230 °C MIN FOR 60 sec. 2) SOLDERING IRONS : TMP. 350±10 °C FOR 5±1 sec.	NO DEFORMATION OF CASE OF EXCESSIVE LOOSENESS OF THE TERMINALS. (note 2)	×	—

(note 1)

THIS PRODUCT HAS FLIP-LOCK CONSTRUCTION. FASTEN FPC ON PCB OR SOMETHING FIXED IF
FORCE IN VERTICAL DIRECTION SHALL BE PREDICTED.

(note 2)


BLISTERS WHICH MAY OCCUR IN HOUSING DO NOT AFFECT PRODUCT PERFORMANCE.

REMARKS	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
Unless otherwise specified, refer to JIS C 5402.	S.SUNAGA 04.03.18	S.SUNAGA 04.03.18	<i>M. Ishida</i> 04.03.18	<i>M. Ishida</i> 04.03.18	



Note QT:Qualification Test AT:Assurance Test X:Applicable Test

HRS HIROSE ELECTRIC CO., LTD.		SPECIFICATION SHEET	PART NO. FH26-**-0.3SHW (05)
CODE NO.(OLD) CL	DRAWING NO. ELC4-154381-01	CODE NO. CL580	2

● 24mmMAX.

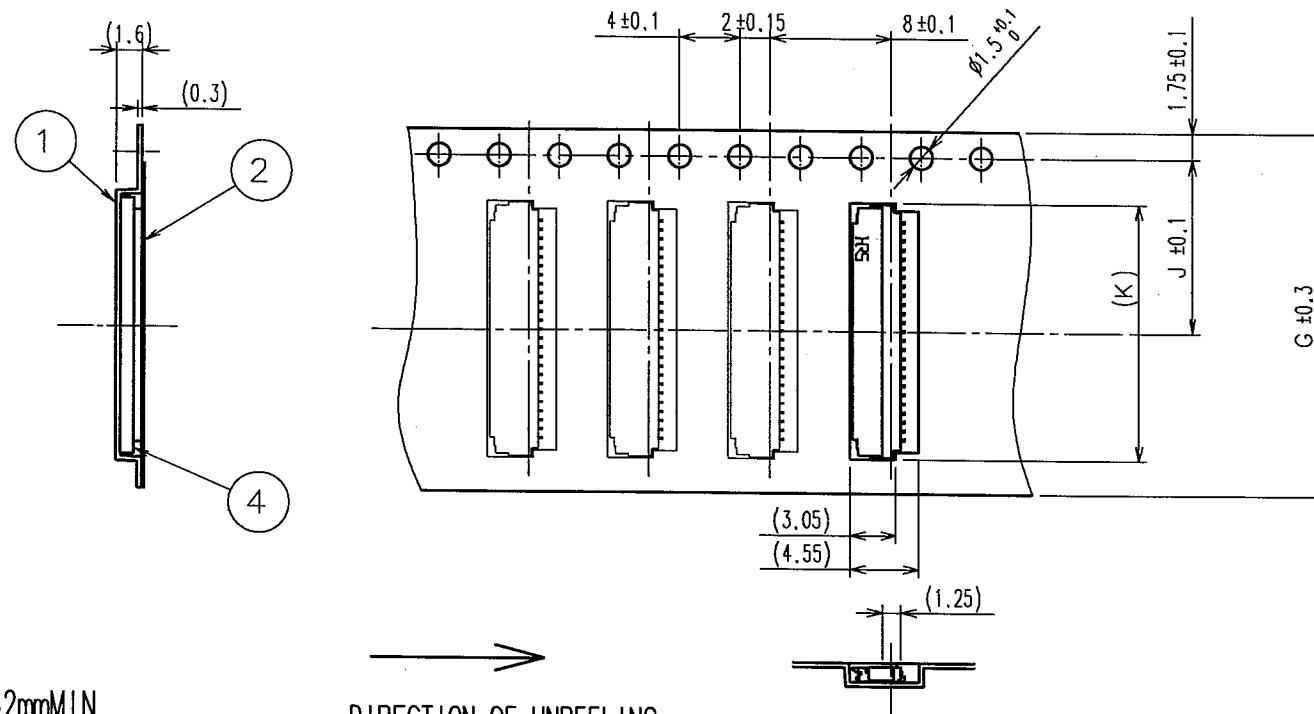


● 32mmMIN

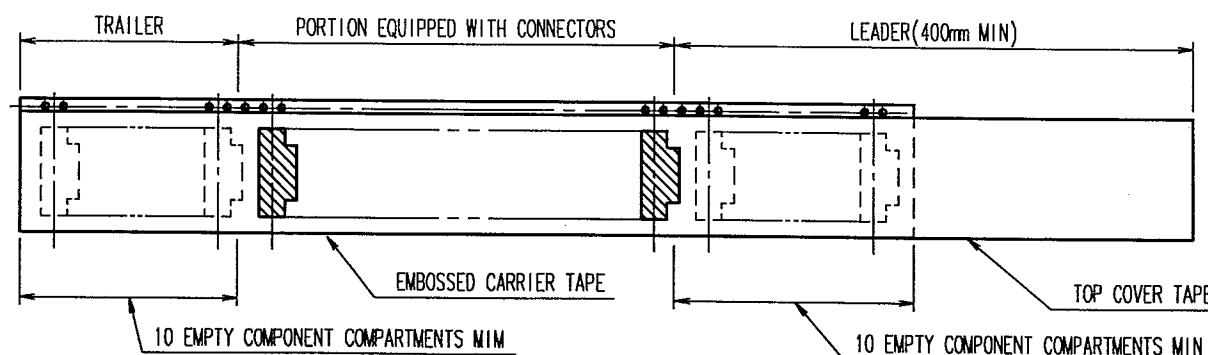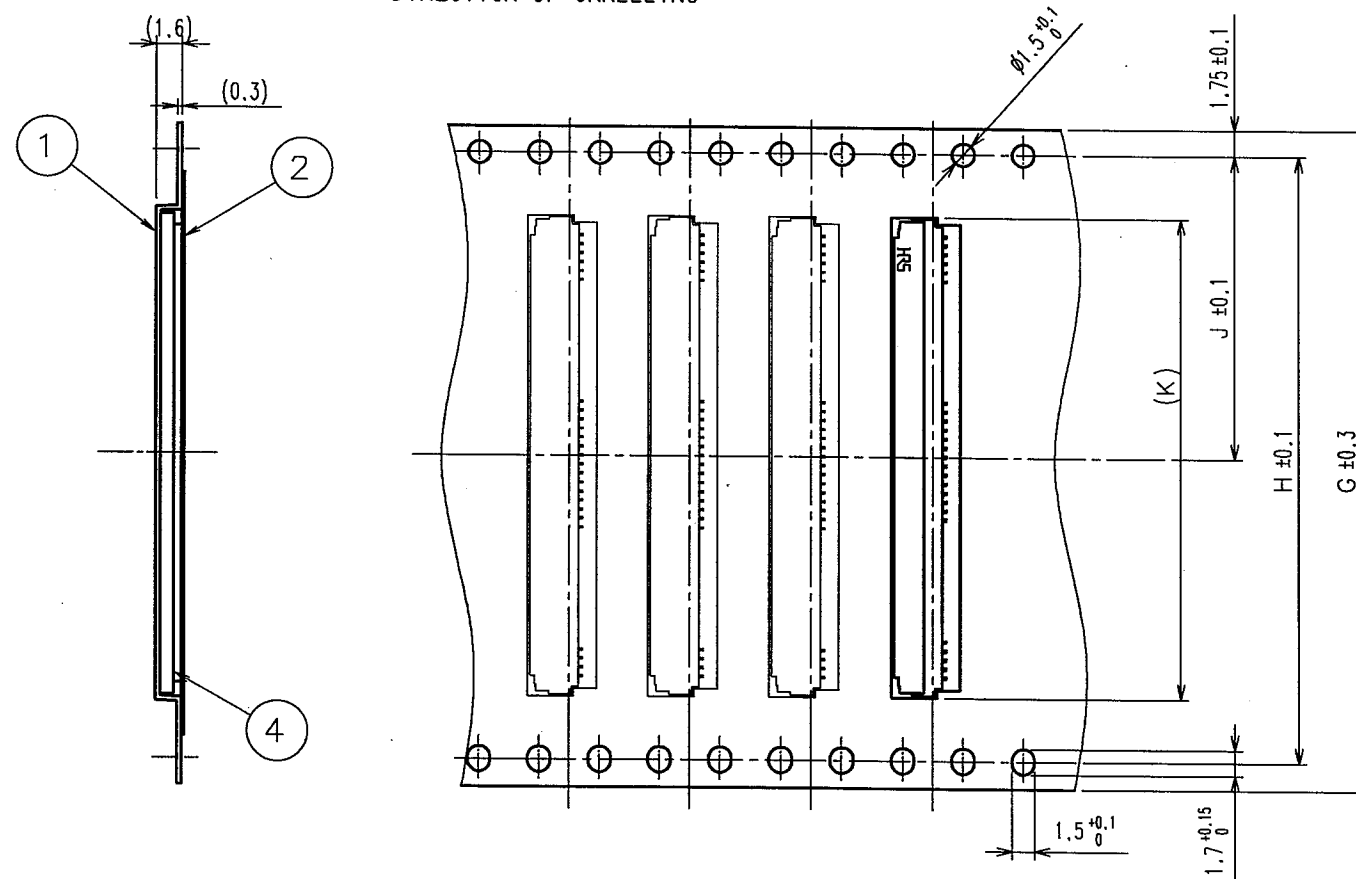

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

REEL DIMENSION (FREE)

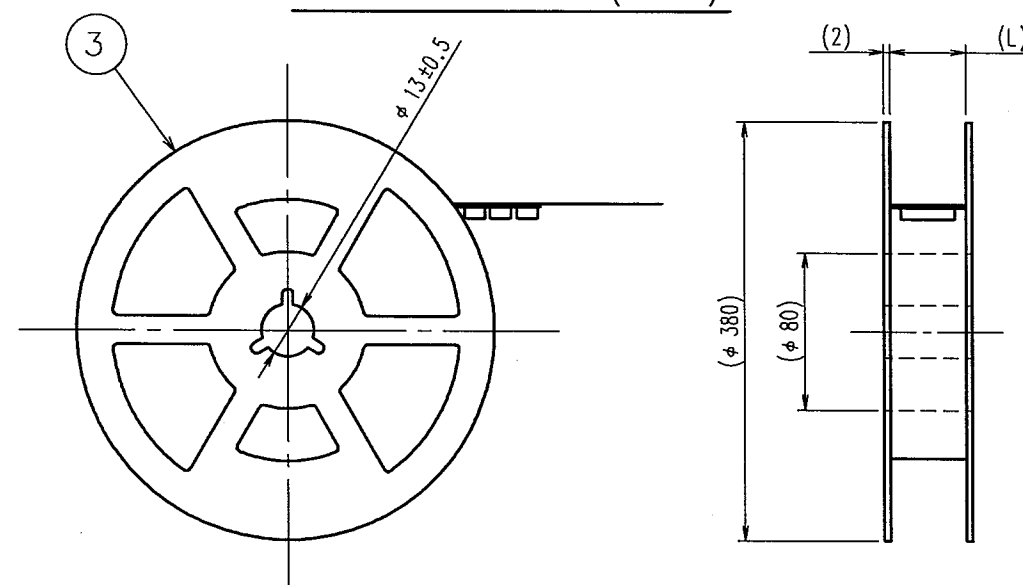

- NOTE 1 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 2 PER REEL : 5000 CONNECTORS.
 3 REFER TO JIS C 0806 (PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING.)

* THIS IS A DRAWING FOR REFERENCE ONLY TO SHOW THE DIMENSIONS WITH THE CONTACT POSITION VARIATION.
 THE CONTENT HEREIN CAN BE CHANGED FOR IMPROVEMENT. PLEASE USE THE OFFICIAL CUSTOMER DRAWING TO CONFIRM DIMENSIONS.
 CONTACT HIROSE FOR DETAILED INFORMATION ABOUT PRODUCT VARIATION.


2	POLYESTER		4	(CONNECTOR)	
1	POLYSTYRENE		3	POLYSTYRENE	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL			DRAWN N. ISHIDA 04.01.26	DESIGNED S. Sunaga 04.02.04	CHECKED Y. Takahata 04.02.04
DRAWING FOR PACKING			APPROVED M. Takahata 04.02.04		
RELEASED					
DRAWING NO. EDC3-154381-01			PART NO. FH26-**-S-0.3SHW(05)		
CODE NO. CL580			3		

TO
NC

* THIS IS A DRAWING FOR REFERENCE ONLY TO SHOW THE DIMENSIONS WITH THE CONTACT POSITION VARIATION.
THE CONTENT HEREIN CAN BE CHANGED FOR IMPROVEMENT. PLEASE USE THE OFFICIAL CUSTOMER DRAWING TO CONFIRM DIMENSIONS.
CONTACT HIROSE FOR DETAILED INFORMATION ABOUT PRODUCT VARIATION.

* NUMBER OF CONTACTS

Part Number	*	DIMENSION OF CONNECTOR, FPC, LAND PATTERN AND METAL MASK						DIMENSION OF DRAWING FOR PACKING					DEVELOPMENT COMPLETED
		A	B	C	D	E	F	G	H	J	K	L	
FH26-15S-0.3SHW(05)	15	6.0	3.6	4.2	4.83	5.5	4.8	16	-	7.5	6.2	16.5	-
FH26-17S-0.3SHW(05)	17	6.6	4.2	4.8	5.43	6.1	5.4	16	-	7.5	6.8	16.5	-
FH26-19S-0.3SHW(05)	19	7.2	4.8	5.4	6.03	6.7	6.0	16	-	7.5	7.4	16.5	-
FH26-21S-0.3SHW(05)	21	7.8	5.4	6.0	6.63	7.3	6.6	16	-	7.5	8.0	16.5	-
FH26-23S-0.3SHW(05)	23	8.4	6.0	6.6	7.23	7.9	7.2	16	-	7.5	8.6	16.5	-
FH26-25S-0.3SHW(05)	25	9.0	6.6	7.2	7.83	8.5	7.8	16	-	7.5	9.2	16.5	-
FH26-27S-0.3SHW(05)	27	9.6	7.2	7.8	8.43	9.1	8.4	16	-	7.5	9.8	16.5	-
FH26-29S-0.3SHW(05)	29	10.2	7.8	8.4	9.03	9.7	9.0	24	-	11.5	10.4	24.5	-
FH26-31S-0.3SHW(05)	31	10.8	8.4	9.0	9.63	10.3	9.6	24	-	11.5	11.0	24.5	-
FH26-33S-0.3SHW(05)	33	11.4	9.0	9.6	10.23	10.9	10.2	24	-	11.5	11.6	24.5	-
FH26-35S-0.3SHW(05)	35	12.0	9.6	10.2	10.83	11.5	10.8	24	-	11.5	12.2	24.5	-
FH26-37S-0.3SHW(05)	37	12.6	10.2	10.8	11.43	12.1	11.4	24	-	11.5	12.8	24.5	-
FH26-39S-0.3SHW(05)	39	13.2	10.8	11.4	12.03	12.7	12.0	24	-	11.5	13.4	24.5	-
FH26-41S-0.3SHW(05)	41	13.8	11.4	12.0	12.63	13.3	12.6	24	-	11.5	14.0	24.5	-
FH26-43S-0.3SHW(05)	43	14.4	12.0	12.6	13.23	13.9	13.2	24	-	11.5	14.6	24.5	-
FH26-45S-0.3SHW(05)	45	15.0	12.6	13.2	13.83	14.5	13.8	24	-	11.5	15.2	24.5	-
FH26-47S-0.3SHW(05)	47	15.6	13.2	13.8	14.43	15.1	14.4	24	-	11.5	15.8	24.5	-
FH26-49S-0.3SHW(05)	49	16.2	13.8	14.4	15.03	15.7	15.0	24	-	11.5	16.4	24.5	-
FH26-51S-0.3SHW(05)	51	16.8	14.4	15.0	15.63	16.3	15.6	24	-	11.5	17.0	24.5	✓
FH26-53S-0.3SHW(05)	53	17.4	15.0	15.6	16.23	16.9	16.2	24	-	11.5	17.6	24.5	-
FH26-55S-0.3SHW(05)	55	18.0	15.6	16.2	16.83	17.5	16.8	32	28.4	14.2	18.2	32.5	-
FH26-57S-0.3SHW(05)	57	18.6	16.2	16.8	17.43	18.1	17.4	32	28.4	14.2	18.8	32.5	-
FH26-59S-0.3SHW(05)	59	19.2	16.8	17.4	18.03	18.7	18.0	32	28.4	14.2	19.4	32.5	-
FH26-61S-0.3SHW(05)	61	19.8	17.4	18.0	18.63	19.3	18.6	32	28.4	14.2	20.0	32.5	-
FH26-63S-0.3SHW(05)	63	20.4	18.0	18.6	19.23	19.9	19.2	32	28.4	14.2	20.6	32.5	-
FH26-65S-0.3SHW(05)	65	21.0	18.6	19.2	19.83	20.5	19.8	32	28.4	14.2	21.2	32.5	-
FH26-67S-0.3SHW(05)	67	21.6	19.2	19.8	20.43	21.1	20.4	44	40.4	20.2	21.8	44.5	-
FH26-69S-0.3SHW(05)	69	22.2	19.8	20.4	21.03	21.7	21.0	44	40.4	20.2	22.4	44.5	-
FH26-71S-0.3SHW(05)	71	22.8	20.4	21.0	21.63	22.3	21.6	44	40.4	20.2	23.0	44.5	-

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL			DRAWN N. ISHIDA 04.01.26	DESIGNED <i>S. Sunaga</i> 04.02.04	CHECKED <i>T. Takahashi</i> 04.02.04
			APPROVED <i>M. Ishida</i> 04.02.04	RELEASED ..	
DRAWING NO. EDC3-154381-01			PART NO. FH26-**-0.3SHW(05)		
SCALE - : 1			CODE NO. CL580		
UNITS mm			4		
			HIROSE ELECTRIC CO., LTD		